

STARLED



LED aisle racking and high bay luminaire. The energy efficient, high performance LED luminaire for warehouse and factory applications.

FEATURES

- Aisle racking applications
- 70% energy saving over T5
- 15m spacings, 10m high to achieve 250 Lux
- 10 watts per square metre
- IP65 version available
- Cold store version available
- Available in 3000K, 4000K & 5000K



LED CHARACTERISTICS

LM70 60K +	LM80 10K	CRI 80	PF >0.9	MACADAM 3 STEP
MH/SON EQUIVALENT	LM/W 156.0	IP20	5 WARRANTY	

TECHNICAL DETAIL


Codes	Description	Replaces	Weight (kg)	Working Temperature	Circuit Watts (W)	Board Lumens	Luminaire Lumens*	LI/cW
SL-RACK-95-5K	95W Aisle Racking Luminaire	150W SON/MH	4.80	-20 +40°	95	13168	12431	130.8
SL-RACK-160-5K	160W Aisle Racking Luminaire	250W SON/MH	5.30	-20 +40°	160	22086	20849	130.3
SL-RACK-190-5K	190W Aisle Racking Luminaire	400W SON/MH	5.70	-20 +40°	190	26337	24862	130.9
STAR-95-HB-5K	95W High Bay Luminaire	150W SON/MH	4.80	-20 +40°	95	13168	12431	130.8
STAR-160-HB-5K	160W High Bay Luminaire	250W SON/MH	5.30	-20 +40°	160	22086	20849	130.3
STAR-190-HB-5K	190W High Bay Luminaire	400W SON/MH	5.70	-20 +40°	190	26337	24862	130.9

*5% Reduction for 4000K version (suffix -4K); 10% Reduction for 3000K (suffix -3K)

OPTIONS AND ACCESSORIES

- EM** Integral Emergency (4 Watt)
- EMST** Integral Emergency Self Test (4 Watt)
- DD** SwitchDIM/DALI
- CFP** Corridor Function PIR
- CFMW** Corridor Function MW (up to 12m)
- CS** Corridor Function Slave
- PIR** Programmable PIR
- MWHL** Microwave Sensor (up to 12m)
- WL** Wireless Control System (see pl05)
- PIRW** Long Range PIR for wireless system
- IP54** IP54 version
- IP65** IP65 version
- SS** 316L Stainless Steel Version

DIMENSIONS

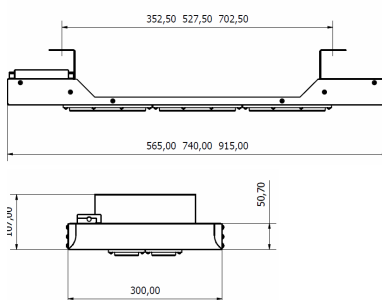

PHOTOMETRIC

