


CONVEX - SHALLOW 18W STANDARD LED BULKHEAD





18W

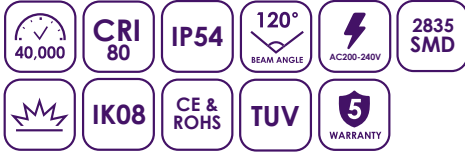

Specification

Power:	18W
Lumens:	3000K - 1530lm, 4000K - 1620lm, 6000K - 1650lm
Lumens per watt:	3000K - 85lm/W, 4000K - 90lm/W, 6000K - 91lm/W
Colour Temp:	3000K, 4000K & 6000K
Beam Angle:	120°
CRI:	Ra>80
Operating Voltage:	AC200-240V 50/60Hz
Lifespan:	40,000 hours
Start Time:	<0.5s
Switching Cycles:	ON/OFF >40,000x
LED CHIP:	Epistar 2835 SMD
IP Rating:	IP54
Fire Rating:	90mins
Acoustic Rated:	Part B
Housing Material:	AL6063 Aluminium
Base:	Wire and plug
Approvals:	CE, RoHS, TUV
Warranty:	5 Years

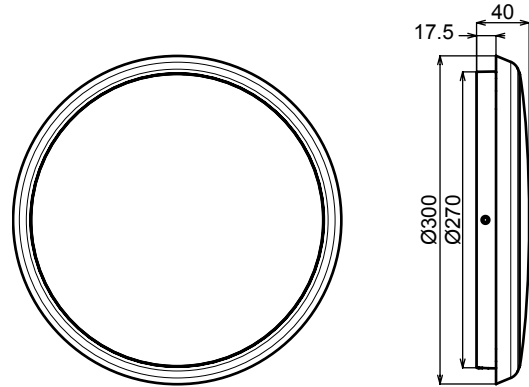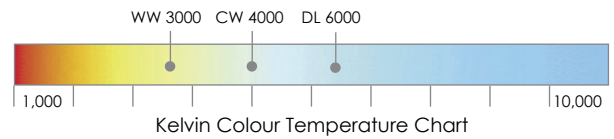




Features & Benefits

- 18 Watts – Upto 1650 lumens
- IP54 rated fitting
- Besa box and surface mountable
- IK08 Impact resistant
- Quality TPA rated diffuser
- No maintenance
- No LED hotspots
- Available in Warm White 3000K Cool White 4000K & Day Light 6000K
- Ideal for corridors, entrance foyer, bathrooms, hospitals homes, offices and educational institutions
- 5 Years Warranty

Product Code	Description	Power	Lumen	Colour	Operating Voltage	Dimensions
2D-3K-18STA	Standard	18W	1530lm	3000K	AC200-240V	Ø300 x 40mm
2D-4K-18STA	Standard	18W	1620lm	4000K	AC200-240V	Ø300 x 40mm
2D-6K-18STA	Standard	18W	1650lm	6000K	AC200-240V	Ø300 x 40mm

CONVEX - SHALLOW 18W STANDARD LED BULKHEAD

Spectral Distribution

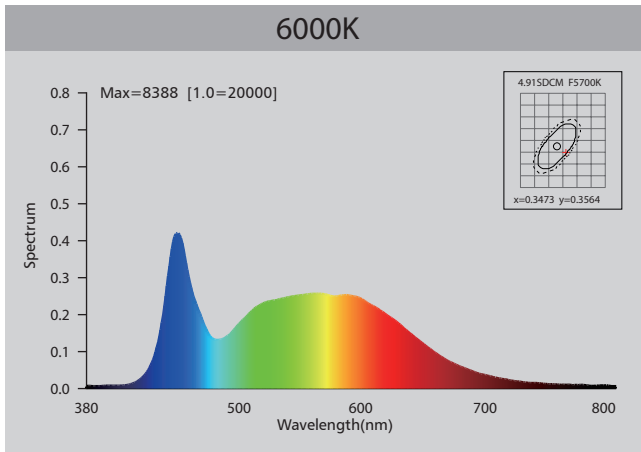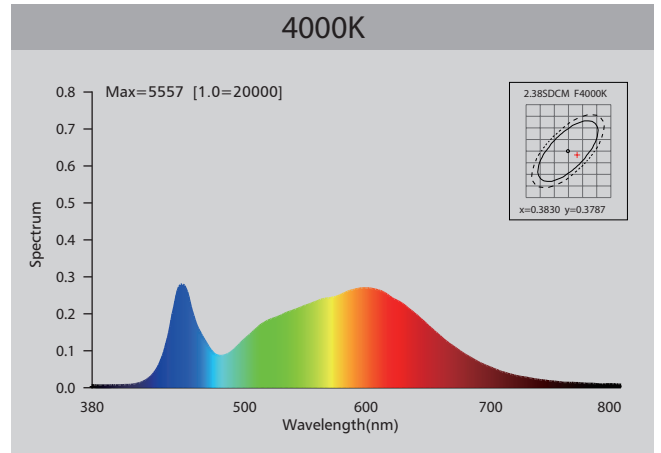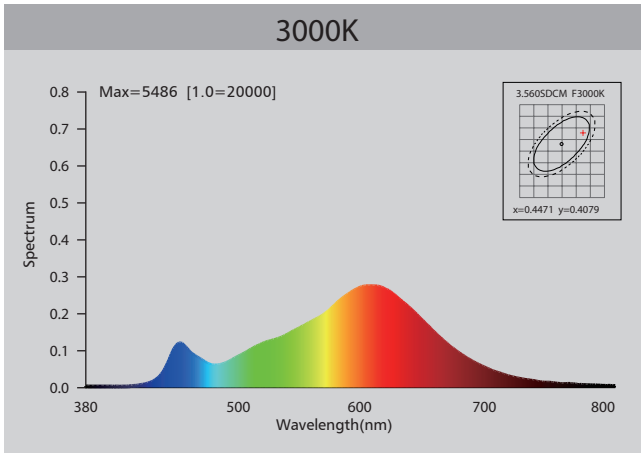

Photometric Diagram

