

CONVEX-SHALLOW 25W LED STANDARD BULKHEAD





25W



Specification

Power:	25W
Lumens:	3000K - 2075lm, 4000K - 2150lm, 6000K - 2275lm
Lumens per watt:	3000K - 83lm/W, 4000K - 86lm/W, 6000K - 91lm/W
Colour Temp:	3000K, 4000K, 6000K
Beam Angle	120°
CRI:	Ra>80
Operating Voltage:	AC200-240V 50/60Hz
Lifespan:	40,000 hours
Start Time:	<0.5s
Switching Cycles:	ON/OFF >40,000x
LED CHIP:	Epistar 2835 SMD
IP Rating:	IP54
Housing Material:	AL6063 Aluminium
Base:	Wire and plug
Approvals:	CE, RoHS, TUV
Warranty:	5 Years

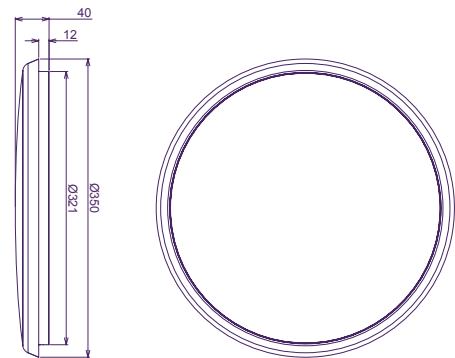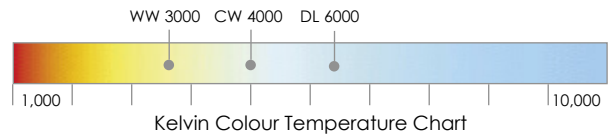

Features & Benefits




- 25Watts – Upto 2275 lumen
- IP54 rated fitting
- Besa box and surface mountable
- IK08 Impact resistant
- Quality TPA rated diffuser
- No maintenance
- No LED hotspots
- Available in Warm White 3000K Cool White 4000K & Day Light 6000K
- Ideal for corridors, entrance foyer, bathrooms, hospitals homes, offices and educational institutions
- 5 Years Warranty

Product Code	Description	Power	Lumen	Colour	Operating Voltage	Dimensions	CE, RoHS & TUV
2D-3K-25STA	Standard	25W	2075lm	3000K	AC200-240V	Ø350 x 40mm	Yes
2D-4K-25STA	Standard	25W	2150lm	4000K	AC200-240V	Ø350 x 40mm	Yes
2D-6K-25STA	Standard	25W	2275lm	6000K	AC200-240V	Ø350 x 40mm	Yes

CONVEX-SHALLOW 25W LED STANDARD BULKHEAD



Spectral Distribution

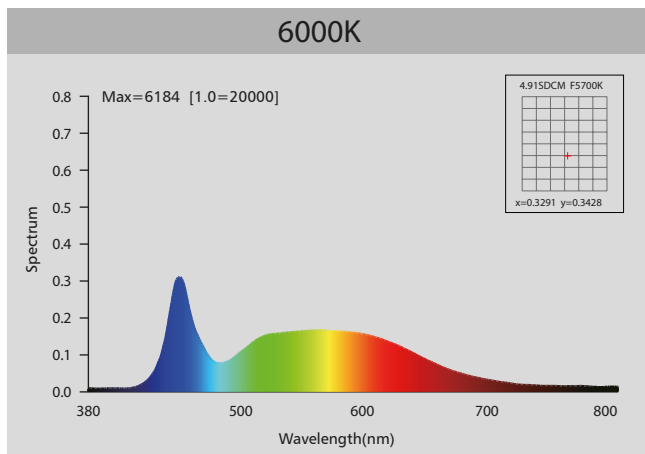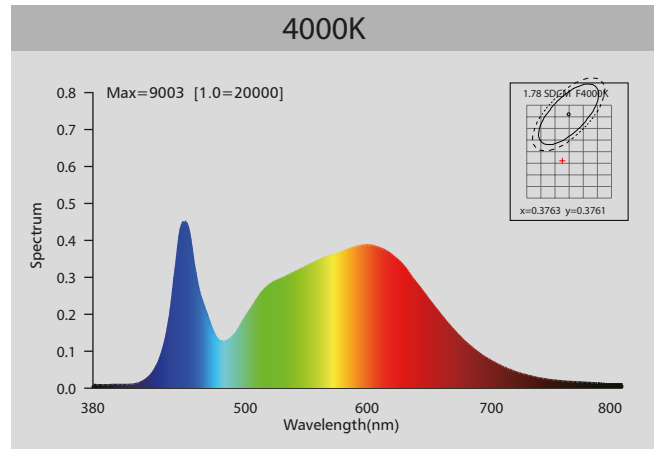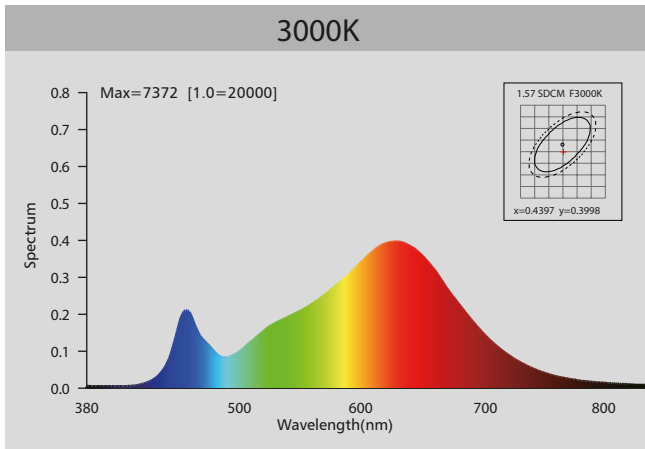

Photometric Diagram

