

LED ROUND PANEL



SAVE LIGHT

LED ROUND BACKLIT PANEL – 6W,12W,18W





Features & Benefits

- Ultra thin – 12mm prole
- Even light distribution
- Available in 3 sizes: 4inch, 6inch & 9inch
- 30,000 hour lifespan
- 3 year warranty

Specification

Power	6W, 12W, 18W	
Lumens	6W	500lm
	12W	1100lm
	18W	1600lm
CRI	88	
Colour Temp	4000K	
Beam Angle	120°	
Operating Voltage	AC100-240V	
LED Type	-	
Rating	IP55	
Class	Class I	
Dimming	-	
Finish	White	
Materials	Housing: Aluminium Diffuser: Polycarbonate	
Lifespan	30,000 hours	
Power Factor	-	
Lumen Efficacy	6W	80lm/W
	12W	91.6lm/W
	18W	86.6lm/W
Start Time	<1sec	
Switching Cycles	>40,000	
Approvals	CE, RoHS	
Options	-	

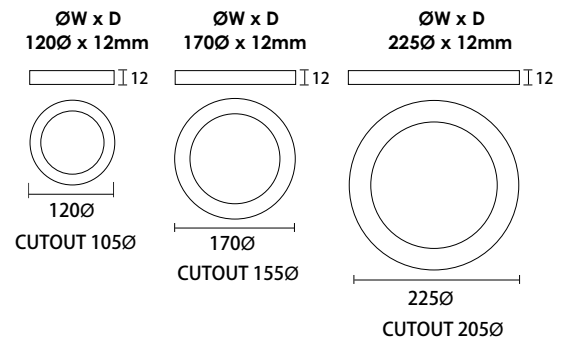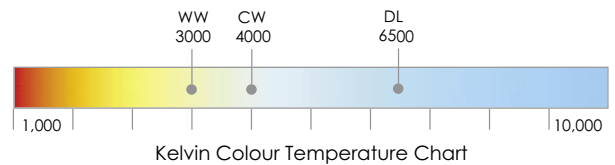

Product Code	Power	Lumen	Colour	Life Expectancy	Operating Voltage	Dimensions	Cutout
SS-RP-6W-3K	6W	500lm	3000K	30,000hrs	AC100-240V	120 Ø x 12	105 Ø
SS-RP-12W-3K	12W	1100lm	3000K	30,000hrs	AC100-240V	170 Ø x 12	155 Ø
SS-RP-18W-3K	18W	1600lm	3000K	30,000hrs	AC100-240V	225 Ø x 12	205 Ø
SS-RP-6W-4K	6W	510lm	4000K	30,000hrs	AC100-240V	120 Ø x 12	105 Ø
SS-RP-12W-4K	12W	1110lm	4000K	30,000hrs	AC100-240V	170 Ø x 12	155 Ø
SS-RP-18W-4K	18W	1610lm	4000K	30,000hrs	AC100-240V	225 Ø x 12	205 Ø
SS-RP-6W-65K	6W	520lm	6500K	30,000hrs	AC100-240V	120 Ø x 12	105 Ø
SS-RP-12W-65K	12W	1120lm	6500K	30,000hrs	AC100-240V	170 Ø x 12	155 Ø
SS-RP-18W-65K	18W	1620lm	6500K	30,000hrs	AC100-240V	225 Ø x 12	205 Ø